



ATPLAS INTERNAL METERING 2025



ABOUT ATPLAS



MANUFACTURING AND QUALITY

Atplas has a rich history of serving the water industry both in the UK and around the world from its base in Bridgend, Wales. It is a recognised and reliable supplier of house connection products for water supply. With an extensive range of boundary boxes for water meters, water fittings and valves for a range of service pipes, Atplas stands for **CERTIFIED QUALITY, PRODUCT INNOVATION** and **YEARS OF KNOW-HOW**.



CERTIFIED QUALITY

Managing quality is a key priority at Atplas and we are proud to be certificated to ISO 9001:2015 and ISO 14001:2015, as well as being certificated to the Achilles UVDB Verify B2 scheme.

We are committed to providing high quality products and where appropriate, many of our parts that are in contact with drinking water have WRAS or BS 6920 approval. Many of our products hold WRAS or similar approvals to demonstrate compliance with regulation 4 of the UK Water Regulations.

PRODUCT INNOVATION

Innovation has been the foundation of our success and products have evolved to meet our customers' changing needs.

YEARS OF KNOW-HOW

With a history in water fittings going back over 100 years, Atplas is able to offer products which meet the needs of both installers and utility companies.

PROVIDING SUSTAINABLE PRODUCTS

As a leading provider of water fittings and valves from the mains, to your water meter, to your home, Atplas strives to protect one of the world's most vital resources - water. This is achieved through the effective design of all our products supporting the sustainable management of water.

We develop, manufacture and market products of high quality with a long lifespan that are part of a vital infrastructure for water supply.

We have a strong focus on sustainability in our production - both in terms of using recycled materials such as recycled plastic in our black Matrix Plus boundary boxes, but also in terms of using renewable energy. We selected our energy supplier as 100% of its electricity is backed by zero carbon generation.

Atplas is certificated under the Achilles carbon reduction scheme and also proudly meets the requirements for zero waste to landfill.

WORKING FOR HEALTH AND SAFETY

Safety and a healthy work environment for our employees is high on the agenda at Atplas - both physically and mentally. It is very important to us that our employees can work in a safe work environment – no matter what role and job they have.

Over 10% of our colleague have been trained as Mental Health First Aiders and many of our employees have long seniority and high expertise within their field. We continuously work on ensuring that Atplas remains an attractive and safe workplace.

We have a strong focus on the safety of our own employees as well as visitors and others. As some of our employees often work in environments with heavy items and under high safety requirements, all production employees have completed extensive safety training.



CONTENTS

PAGE

INTERNAL METERING	
AT GLANCE	005
WATER POINT	010
TALBOT INTERNAL METER	
CARRIER	012
EBCO METER VALVES	014
EBCO METER CARRIER FOR CONCENTRIC METER	016
EBCO WATER METER KITS	018
EBCO METER TAILS	019
MULTI METER MANIFOLD	022

EBCO BS5433 STOPCOCK	031
TALBOT BS5433 STOPCOCK	032
EBCO BS1010 STOPVALVE	033
EBCO LEVER BALL VALVE	034
EBCO SPHERICAL BALL VALVE	035

BOUNDARY BOXES

Atplas has decades of experience as the leading supplier of boundary boxes for water meters to the UK Water Utilities and European Municipalities since the early 1980s. Innovation has been the foundation of our success and product has evolved to meet both the technical and cost criteria encountered. The product range has expanded beyond a simple chamber with a meter-port and valve at the bottom, to include different connections, employing new materials and multiple service alternatives.



INTERNAL METERING

Atplas has now expanded its offering for internal water metering from gunmetal manifolds and plastic multimanifolds to single meter carriers, including the unique Water Point internal metering box which hides the meter, stop valve and drain point. Also new to the range are parts to connect inline water meters to the drinking water system. This completes Atplas's house connection offering to the water industry.



WATER POINT METER BOX

The unique Water Point provides a safe place for a concentric water meter inside a property. It hides all the pipework connections with its unobtrusive design, making it ideal for either new build or retrofit metering.



WATER METER KITS FOR INLINE METERS AND ACCESSORIES

Parts for the connection of inline meters inside the property, including meter tails with integral drain off valves and isolation valves.



CONCENTRIC METER MANIFOLDS

Allows a quick and easy fitting of a concentric water meter inside a property. Connects directly to the incoming mains pipe in copper or PE and includes an integral drain off valve.



MULTI METER MANIFOLDS

These are used where a single supply pipe is split to feed multi-occupancy dwellings or offices. They are typically fitted in a service room or service duct which contains the water meters for all the properties.





INTERNAL METERING

WATER POINT	010
TALBOT INTERNAL METER	
CARRIER	012
EBCO METER VALVES	014
EBCO METER CARRIER FOR CONCENTRIC METER	016
EBCO WATER METER KITS	018
EBCO METER TAILS	019
MULTI METER MANIFOLD	022

WATER POINT

The Atlas Water Point provides a visually elegant, safe environment to house water meters which are installed inside a property. The Water Point consists of a stopcock and a concentric meter port with a built in non-return valve and drain-off point, which can be accessed by removing the front cover of the box. The meter can be read through the lens on the top of the box. The box is large enough to also contain AMR equipment.



FUNCTIONS

For fitting a concentric water meter inside a property

ADVANTAGES

- └ **Unobtrusive design**
Enables water meter to be fitted anywhere in the property.
- └ **Safe environment**
Prevents accidental damage to water meter or stopcock.
- └ **Emergency shutoff**
Provides a clear point to isolate the water supply in case of emergency
- └ **Reliable and leak free**
Specifically designed to operate at pressures up to 16 bar (240 psi) subject to the ratings of the pipe.
- └ **Flexible connections**
Variants for copper or PE connection in different sizes.

USES

- └ **Fitting a concentric meter G 1 ½" internally in a property**
 - The meter carrier can be fitted to 25mm MDPE or 15mm copper or 22mm domestic pipework.
 - Integrated drain off plug allows for draining down of the whole property's water pipes.
 - Can be used for new build or for retrofit metering.



WATER POINT

Specification

Water Point Internal Meter Box for concentric meter, ABS Box, POM manifold, Nitrile/EPDM/PTFE seals, integrated drain off and stopcock, WRAS approved product, PN16



Product Code	Pipe dia. Inlet MM	Inlet Connection	Pipe dia. Outlet MM	Outlet Connection
WA3261515AM	15	Compression	15	Compression
WA3261522AM	15	Compression	22	Compression
WA3262215AM	22	Compression	15	Compression
WA3262222AM	22	Compression	22	Compression
WA3262515AM	25	PE Pushfit	15	Compression
WA3262522AM	25	PE Pushfit	22	Compression

WATER POINT NO COVER

Specification

Water Point Internal Meter Box for concentric meter, ABS Box, POM manifold, Nitrile/EPDM/PTFE seals, integrated drain off and stopcock, WRAS approved product, PN16, no cover



Product Code	Pipe dia. Inlet MM	Inlet Connection	Pipe dia. Outlet MM	Outlet Connection
WA3271515BM	15	Compression	15	Compression
WA3271522BM	15	Compression	22	Compression
WA3272215BM	22	Compression	15	Compression
WA3272222BM	22	Compression	22	Compression
WA3272515BM	25	PE Pushfit	15	Compression
WA3272522BM	25	PE Pushfit	22	Compression

TALBOT INTERNAL CONCENTRIC METER CARRIER

For quick and easy fitting of a concentric water meter inside a property. The carrier comes complete with a non-return valve and drain-off point, for simple and compact fitting and exchange of the meter. The range features different connection sizes for PE and/or copper pipe to fit every installation situation.



FUNCTIONS

Allows the fitting of a concentric meter inside a property.

ADVANTAGES

- └ **Easy installation**
Simple to install and fit or exchange a meter.
- └ **Protects the property**
Integrated non-return valve protects the water network from backflow contamination.
- └ **Drain off point**
Integrated drain valve to make it easy to drain the whole property.
- └ **Flexible connections**
Variants for copper or PE connection in different sizes.

USES

- └ **Fitting a concentric meter G 1 ½" internally in a property**
 - The meter carrier can be fitted to 20mm or 25mm MDPE or 15mm copper or 22mm copper compression.
 - Integrated drain off plug allows for draining down of the whole property's water pipes.
 - Can be used for new build or for retrofit metering.

CHARACTERISTICS

- └ **Main body** from plastic (POM) with feet to screw down.
- └ **Full flow meter cap** - plastic. Allows manifold to be flushed and tested prior to fitting the meter. Also compatible with the trickle flow and no flow caps.
- └ **Drain off valve** - to meet BS 2464.
- └ **NRV** - integrated in meter port. To WIS 5-11-01.
- └ **Range of different outlets** for PE pushfit connection or copper compression fitting.
- └ **Meter connection** - for G 1 ½" meter to BS EN ISO 4064. Fits all commonly sold concentric meters.

TALBOT INTERNAL METER CARRIER

Specification

Talbot Internal Meter Carrier for concentric meter, POM body, EPDM seals, integrated drain off to BS2464, WRAS approved product, PN16



Product Code	Pipe dia. Inlet MM	Inlet Connection	Pipe dia. Outlet MM	Outlet Connection
MA3261515AM	15	Compression	15	Compression
MA3261522AM	15	Compression	22	Compression
MA3262215AM	22	Compression	15	Compression
MA3262222AM	22	Compression	22	Compression
MA3262515AM	25	PE Pushfit	15	Compression
MA3262522AM	25	PE Pushfit	22	Compression

TALBOT INTERNAL METER CARRIER MANIFOLD

Specification

Talbot Internal Meter Carrier Manifold for concentric meter, BS5433 plastic stopcock, POM body, EPDM seals, integrated drain off to BS2464, WRAS approved product, PN16



Product Code	Pipe dia. Inlet MM	Inlet Connection	Pipe dia. Outlet MM	Outlet Connection
WA3281515BM	15	Compression	15	Compression
WA3281522BM	15	Compression	22	Compression
WA3282215BM	22	Compression	15	Compression
WA3282222BM	22	Compression	22	Compression
MA3282515AM	25	PE Pushfit	15	Compression
MA3282522AM	25	PE Pushfit	22	Compression

EBCO RAISED METER VALVE

Specification

EBCO Base Meter Valve for concentric meter, Gunmetal CC491K body, EPDM seals, WRAS approved product, PN16



Product Code	Inlet D	Inlet Connection	Outlet D	Blanking Plug	Outlet Connection
MVB0030	3/4"	Male BSP	3/4"	Full Flow	Male BSP
MVB0040	3/4"	Male BSP	3/4"	No Flow	Male BSP
MVB0210	3/4"	Female BSP	3/4"	Full Flow	Female BSP
MVB0250	1"	Male BSP	3/4"	Full Flow	Female BSP
MVB0230	1"	Male BSP	1"	Full Flow	Male BSP

EBCO BASE METER VALVE

Specification

EBCO Base Meter Valve for concentric meter, Gunmetal CC491K body, EPDM seals, WRAS approved product, PN16



Product Code	Inlet D	Inlet Connection	Pipe dia. Outlet MM	Outlet Connection
MVS0110	3/4"	Female BSP	3/4"	Female BSP
MVB0420	3/4"	Female BSP	15	Compression

EBCO RAISED METER VALVE

Specification

EBCO Raised Meter Valve for concentric meter, Gunmetal CC491K body, EPDM seals, WRAS approved product, PN16



Product Code	Pipe dia. Inlet MM	Inlet Connection	Pipe dia. Outlet MM	Outlet Connection
MVR0020	25	Pushfit	25	Pushfit
MVR0040	25	PE pipe tail	25	PE pipe tail

EBCO SPHERICAL METER VALVE

Specification

EBCO Spherical Meter Valve for concentric meter, Gunmetal CC491K body, 1/4 turn isolation, EPDM seals, PN17



LEFT HAND TURN

Product Code	Pipe dia. Inlet MM	Inlet Connection	Pipe dia. Outlet MM	Outlet Connection
MVS2515L	25	Pushfit	15	Compression
MVS2522L	25	Pushfit	22	Compression

RIGHT HAND TURN

Product Code	Pipe dia. Inlet MM	Inlet Connection	Pipe dia. Outlet MM	Outlet Connection
MVS2515R	25	Pushfit	15	Compression
MVS2522R	25	Pushfit	22	Compression

EBCO METER CARRIER FOR CONCENTRIC METER

Specification

EBCO Meter Carrier for concentric meter, Gunmetal CC491K body, EPDM seals, integrated drain off to BS2464, PN16



Product Code	Inlet D	Inlet Connection	Outlet D	Outlet Connection
MVH0001	3/4"	Male BSP	3/4"	Male BSP
MVH0010	1"	Male BSP	1"	Male BSP
MVH0020	1 1/4"	Male BSP	1 1/4"	Male BSP

EBCO METER CARRIER FOR CONCENTRIC METER

Specification

EBCO Meter Carrier for concentric meter, Gunmetal CC491K body, EPDM seals, integrated drain off to BS2464, PN16



Product Code	Pipe dia. Inlet MM	Inlet Connection	Pipe dia. Outlet MM	Outlet Connection
MVH0080	15	Compression	15	Compression



EBCO WATER METER KITS FOR INLINE METERS

To fit an inline meter inside a property. The kit comes with a straight meter tail on one side and on the other side a meter tail with an integrated ball valve and drain off point. Available with a range of different connections.



FUNCTIONS

Allows the fitting of an inline meter inside a property

ADVANTAGES

Easy installation

Simple to install and fit or exchange a meter.

No leaching of lead

Made from low lead DZR brass.

No flow restriction

Full bore.

All in one

No need for separate drain valve or isolating valve.



APPROVALS




CHARACTERISTICS

- Body made from CW602N (CZ132) DZR Brass, low lead content
- Integrated ball valve
- Integrated drain valve, rotatable
- Full bore, so no flow restriction

USES

Fitting an inline meter inside a property

- The meter can be fitted to either 15mm or 22mm copper compression or press fit
- Integrated drain off plug
- Can be used for new build or retrofit metering.

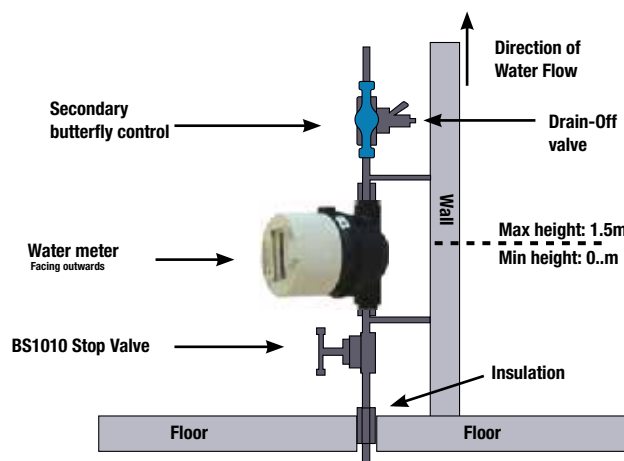

- With compression ends, tails for press fit, or press fit sockets, 15mm or 22mm
- Also available as plain meter tails straight DN15, DN20, DN25, DN30 and DN40, and 90 degree DN15 and DN20.

EBCO INLINE METER CONNECTION KIT

Specification

EBCO Inline Meter Connection Kit, DZR brass CW602N body full bore, integrated isolation valve and drain point, press sockets for M profile jaws, WRAS approved product PN10



Product Code	Pipe dia. Inlet MM	Inlet Connection	Pipe dia. Outlet MM	Outlet Connection	Meter Nominal Size	Meter Connection
MKCF1515	15	Compression	15	Compression	DN15	Rp 3/4" BSP
MKCF2222	22	Compression	22	Compression	DN20	Rp 1" BSP
MKPF1515	15	Brass tail for compression / press	15	Brass tail for compression / press	DN15	Rp 3/4" BSP
MKPF2222	22	Brass tail for compression / press	22	Brass tail for compression / press	DN20	Rp 1" BSP
MKPFS1515	15	Press fit socket	15	Press Fit Socket	DN15	Rp 3/4" BSP
MKPFS2222	22	Press fit socket	22	Press Fit Socket	DN20	Rp 1" BSP

EBCO INLINE METER STRAIGHT TAILS

Specification

EBCO Inline Meter Straight Tails, DZR brass CW602N, 2 tails



Product Code	Pipe dia. Inlet MM	Inlet Connection	Pipe dia. Outlet MM	Outlet Connection	Meter Nominal Size	Meter Connection
MT15	15	Brass tail for compression / press	15	Brass tail for compression / press	DN15	Rp 3/4" BSP
MT20	22	Brass tail for compression / press	22	Brass tail for compression / press	DN20	Rp 1" BSP
MT25	1 1/4"	Male BSP	1 1/4"	Male BSP	DN25	Rp 1 1/4" BSP
MT30	1 1/2"	Male BSP	1 1/2"	Male BSP	DN30	Rp 1 1/2" BSP
MT40	2"	Male BSP	2"	Male BSP	DN40	Rp 2" BSP

EBCO INLINE METER BENT TAILS

Specification

EBCO Inline Meter Bent Tails, DZR brass
CW602N nut, copper pipe, 2 tails



Product Code	Pipe dia. Inlet MM	Inlet Connection	Pipe dia. Outlet MM	Outlet Connection	Meter Nominal Size	Meter Connection
MT9015	15	Copper pipe	15	Copper pipe	DN15	Rp 3/4" BSP
MT9020	22	Copper pipe	22	Copper pipe	DN20	Rp 1" BSP


EBCO QUICK-FIT WATER METER ADAPTOR

Specification

EBCO Quick-Fit Water Meter Adaptor,
Brass C48600 body, NBR/PTFE seals,
PN10



Product Code	Pipe dia. Inlet MM	Inlet Connection	Pipe dia. Outlet MM	Outlet Connection
E11744	1/2"	Male BSP	1/2"	Male BSP

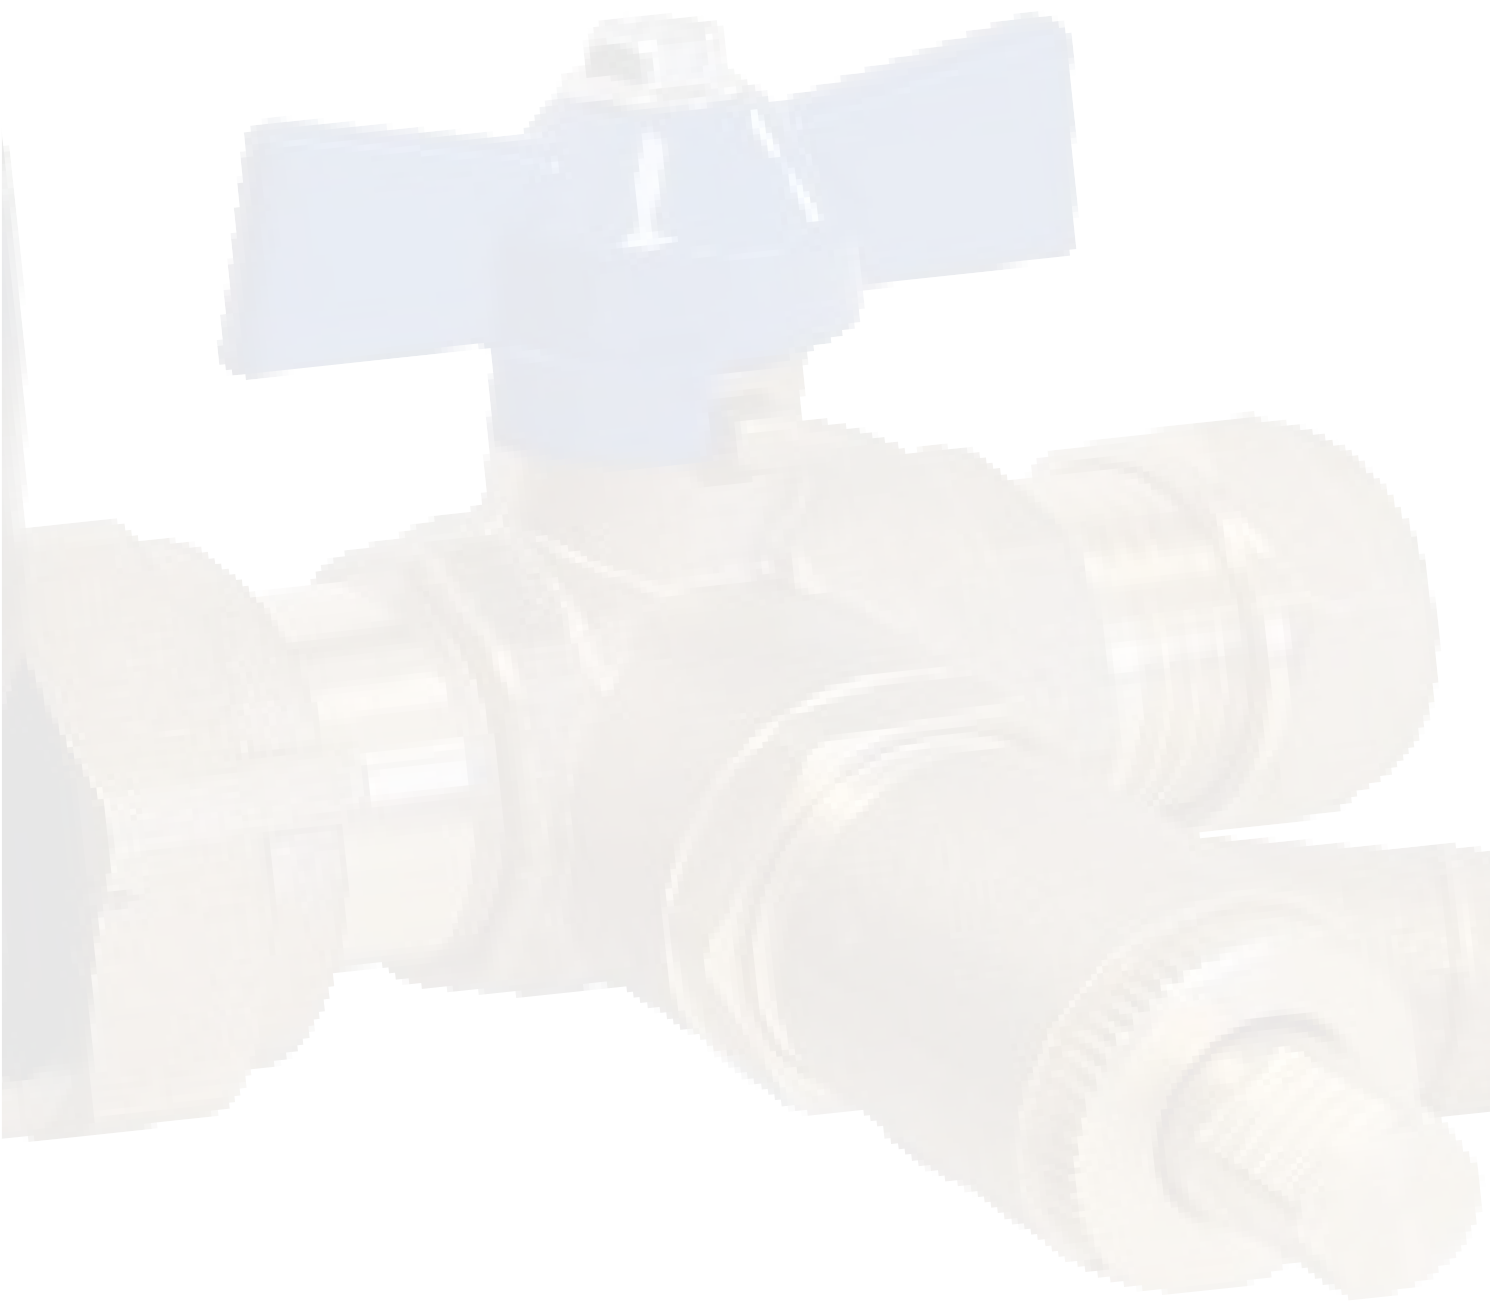

MULTI METER MANIFOLDS

Manifold systems divide a water service pipe into several outlets each of which has a separate shut off device and the possibility of fitting a water meter. They can be used in crowded areas for multi-dwelling developments, and are commonly fitted either in underground chambers, basements or service rooms of apartment blocks.

Atplas sells manifolds in gunmetal (4 or 6 port) or plastic (2 to 12 ports).



TECHNICAL DATA

Materials: Gunmetal CC491K (EBCO) or Acetal/Polypropylene (TALBOT) **Nominal Pressure (PN):**

Working: 16 bar

Medium Temperature: up to 40 °C

ADVANTAGES

COMPACT

6 port manifold fits a standard 18"x24" meter chamber

ANTI-CORROSIVE

Gunmetal or plastic is robust and corrosion resistant even in the most aggressive ground conditions

FLEXIBILITY

The plastic manifold system can be supplied in almost any configuration to give a product suited to customers' needs

CHARACTERISTICS

└ **The EBCO Stopvalve Manifold System** – Used to divide a water service pipe into either 6 or 4 outlets, each outlet having its own shut-off device in either screwdown or ¼ turn operation and the option for individual metering facilities. The system can be used in crowded areas for multidwelling developments. It is a simple and robust unit and both its 4 and 6 port configurations are compact enough to be installed in a standard 24"x18" chamber

└ **The cost effective Talbot Stopvalve Manifold System** – Used to divide a water service pipe into virtually any number of outlets, each outlet having its own shut-off device and the option for individual metering facilities. The system can be used in crowded areas for multi-dwelling developments and its modular construction provides a wide range of installation options. The Talbot Stopvalve Manifold System is a purpose designed unit which gives maximum benefit to both the installer and operator



FEATURES

└ **The EBCO manifold system** comes as either a 4 or 6 port manifold. 1 ½" female inlet and ¾" female outlets allow most types of connections to be fitted. Supplied with stopvalves, each outlet has its own shut-off device which is available with a screw down valve based on BS 5433 or ¼ turn ball valve

└ **Staggered meter** mounts on the 6 port unit means that the unit is compact enough to fit an 18"x24" meter chamber. Each unit is supplied individually boxed for quick and easy on site assembly


└ **The Talbot Modular Manifold system** divides a single inlet of either 50 or 63mm Talbot Pushfit for PE or female thread connection into virtually any number of outlets required depending on site conditions and water pressure

└ **The shut off device** is a multi-turn stopvalve and has a removable key with torque overload protection.

The outlets are of either 20 or 25mm Talbot Pushfit or ¾" female threaded connections. The Talbot Pushfit connection uses a common body and only two sets of interchangeable components to connect to metric PE pipes and their imperial equivalents

└ **Design and selection** of materials gives light weight for easy handling, high strength for installation and operation as well as corrosion resistance for long life. The manifold is made of acetal plastic with a polypropylene stopvalve rotor and key. Seals are made from EPDM, nitrile rubber or thermoplastic elastomers

TALBOT MODULAR MANIFOLD SYSTEM

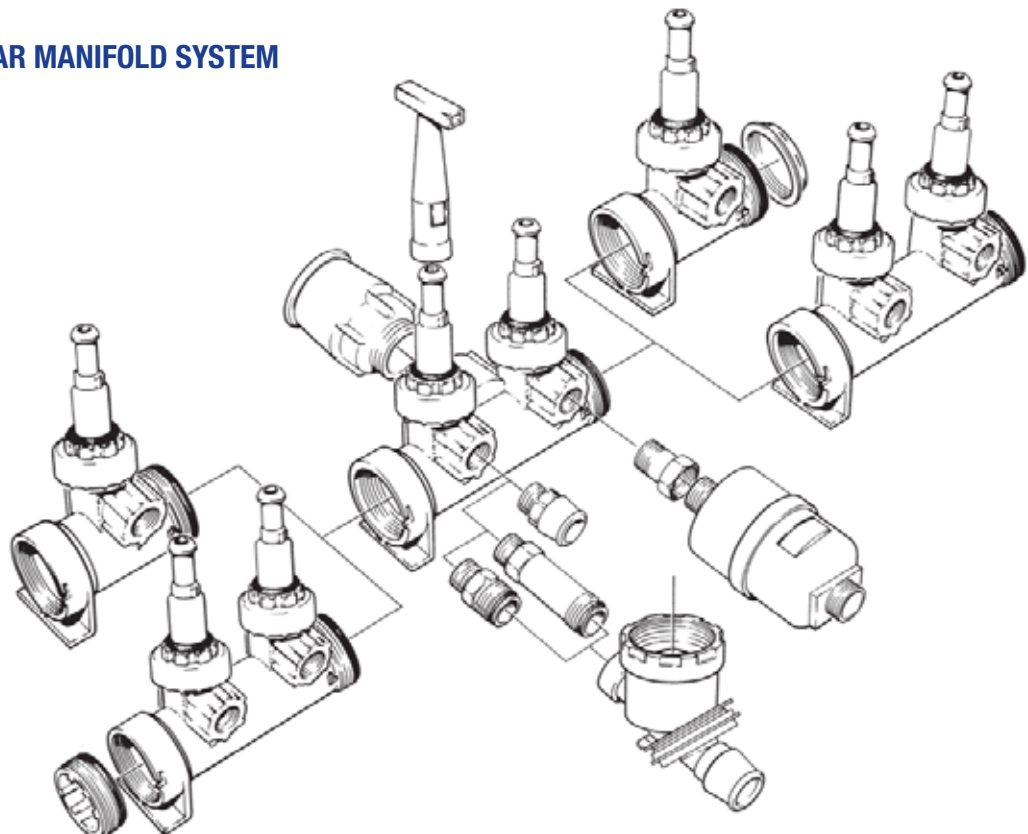

TALBOT MODULAR MANIFOLD SYSTEM WITH METER CARRIER

Specification

Talbot Modular Manifold System for concentric meters, Acetal body, EPDM seals, PN16



Product Code	Pipe dia. Inlet MM	Inlet Connection	Pipe dia. Outlet MM	Outlet Connection
E3707	50	Pushfit	2 x 25	Pushfit
E3708	50	Pushfit	3 x 25	Pushfit
E3709	50	Pushfit	4 x 25	Pushfit
E3710	50	Pushfit	5 x 25	Pushfit
E3711	50	Pushfit	6 x 25	Pushfit
E3712	50	Pushfit	7 x 25	Pushfit
E3713	50	Pushfit	8 x 25	Pushfit
E3714	50	Pushfit	9 x 25	Pushfit
E3715	50	Pushfit	10 x 25	Pushfit
E3716	50	Pushfit	11 x 25	Pushfit
E3717	50	Pushfit	12 x 25	Pushfit
E3718	63	Pushfit	2 x 25	Pushfit
E3719	63	Pushfit	3 x 25	Pushfit
E3720	63	Pushfit	4 x 25	Pushfit
E3721	63	Pushfit	5 x 25	Pushfit
E3722	63	Pushfit	6 x 25	Pushfit
E3723	63	Pushfit	7 x 25	Pushfit
E3724	63	Pushfit	8 x 25	Pushfit
E3725	63	Pushfit	9 x 25	Pushfit
E3726	63	Pushfit	10 x 25	Pushfit
E3727	63	Pushfit	11 x 25	Pushfit
E3728	63	Pushfit	12 x 25	Pushfit
E4592	2"	Female BSP	2 x 25	Pushfit
E5896	2"	Female BSP	4 x 25	Pushfit
E5017	2"	Female BSP	6 x 25	Pushfit

TALBOT MODULAR MANIFOLD SYSTEM

Specification

Talbot Modular Manifold System, Acetal body, EPDM seals, PN16



Product Code	Pipe dia. Inlet MM	Inlet Connection	Pipe dia. Outlet MM	Outlet Connection
E3751	50	Pushfit	2 x 25	Pushfit
E3752	50	Pushfit	3 x 25	Pushfit
E3753	50	Pushfit	4 x 25	Pushfit
E3754	50	Pushfit	5 x 25	Pushfit
E3755	50	Pushfit	6 x 25	Pushfit
E3756	50	Pushfit	7 x 25	Pushfit
E3757	50	Pushfit	8 x 25	Pushfit
E3758	50	Pushfit	9 x 25	Pushfit
E3759	50	Pushfit	10 x 25	Pushfit
E3760	50	Pushfit	11 x 25	Pushfit
E3761	50	Pushfit	12 x 25	Pushfit
E3762	63	Pushfit	2 x 25	Pushfit
E3763	63	Pushfit	3 x 25	Pushfit
E3764	63	Pushfit	4 x 25	Pushfit
E3765	63	Pushfit	5 x 25	Pushfit
E3766	63	Pushfit	6 x 25	Pushfit
E3767	63	Pushfit	7 x 25	Pushfit
E3768	63	Pushfit	8 x 25	Pushfit
E3769	63	Pushfit	9 x 25	Pushfit
E3770	63	Pushfit	10 x 25	Pushfit
E3771	63	Pushfit	11 x 25	Pushfit
E3772	63	Pushfit	12 x 25	Pushfit

EBCO 4 PORT MANIFOLD WITHOUT METER VALVE

Specification

EBCO 4 Port Manifold, Gunmetal CC491K body, WRAS approved product PN16



Product Code	Inlet D	Inlet Connection	Outlet D	Outlet Connection
MANI4	1 1/2"	Female BSP	4 x 3/4"	Female BSP

EBCO 4 PORT MANIFOLD KIT FORM

Specification

EBCO 4 Port Manifold, Gunmetal CC491K body, kit form, WRAS approved product PN16



Product Code	Inlet D	Inlet Connection	Outlet D	Outlet Connection
MANI402	1 1/2"	Female BSP	4 x 3/4"	Female BSP
MANI403	1 1/2"	Female BSP	4 x 3/4"	Female BSP
MANI411	1 1/2"	Female BSP	4 x 3/4"	Female BSP
MANI451	1 1/2"	Female BSP	4 x 3/4"	Female BSP

EBCO 4 PORT MANIFOLD ASSEMBLED

Specification

EBCO 4 Port Manifold, Gunmetal CC491K body, assembled, WRAS approved product PN16



Product Code	Inlet D	Inlet Connection	Outlet D	Outlet Connection
MANI420	1 1/2"	Female BSP	4 x 3/4"	Female BSP
MANI452	1 1/2"	Female BSP	4 x 3/4"	Female BSP

EBCO 6 PORT MANIFOLD WITHOUT METER VALVE

Specification

EBCO 6 Port Manifold, Gunmetal CC491K body, WRAS approved product PN16



Product Code	Inlet D	Inlet Connection	Outlet D	Outlet Connection
MANI6	1 1/2"	Female BSP	6 x 3/4"	Female BSP


EBCO 6 PORT MANIFOLD KIT FORM

Specification

EBCO 6 Port Manifold, Gunmetal CC491K body, kit form, WRAS approved product PN16



Product Code	Pipe dia. Inlet MM	Inlet Connection	Pipe dia. Outlet MM	Outlet Connection
MANI602	1 1/2"	Female BSP	6 x 3/4"	Male BSP
MANI603	1 1/2"	Female BSP	6 x 3/4"	Male BSP
MANI611	1 1/2"	Female BSP	6 x 3/4"	Female BSP
MANI651	1 1/2"	Female BSP	6 x 3/4"	Female BSP

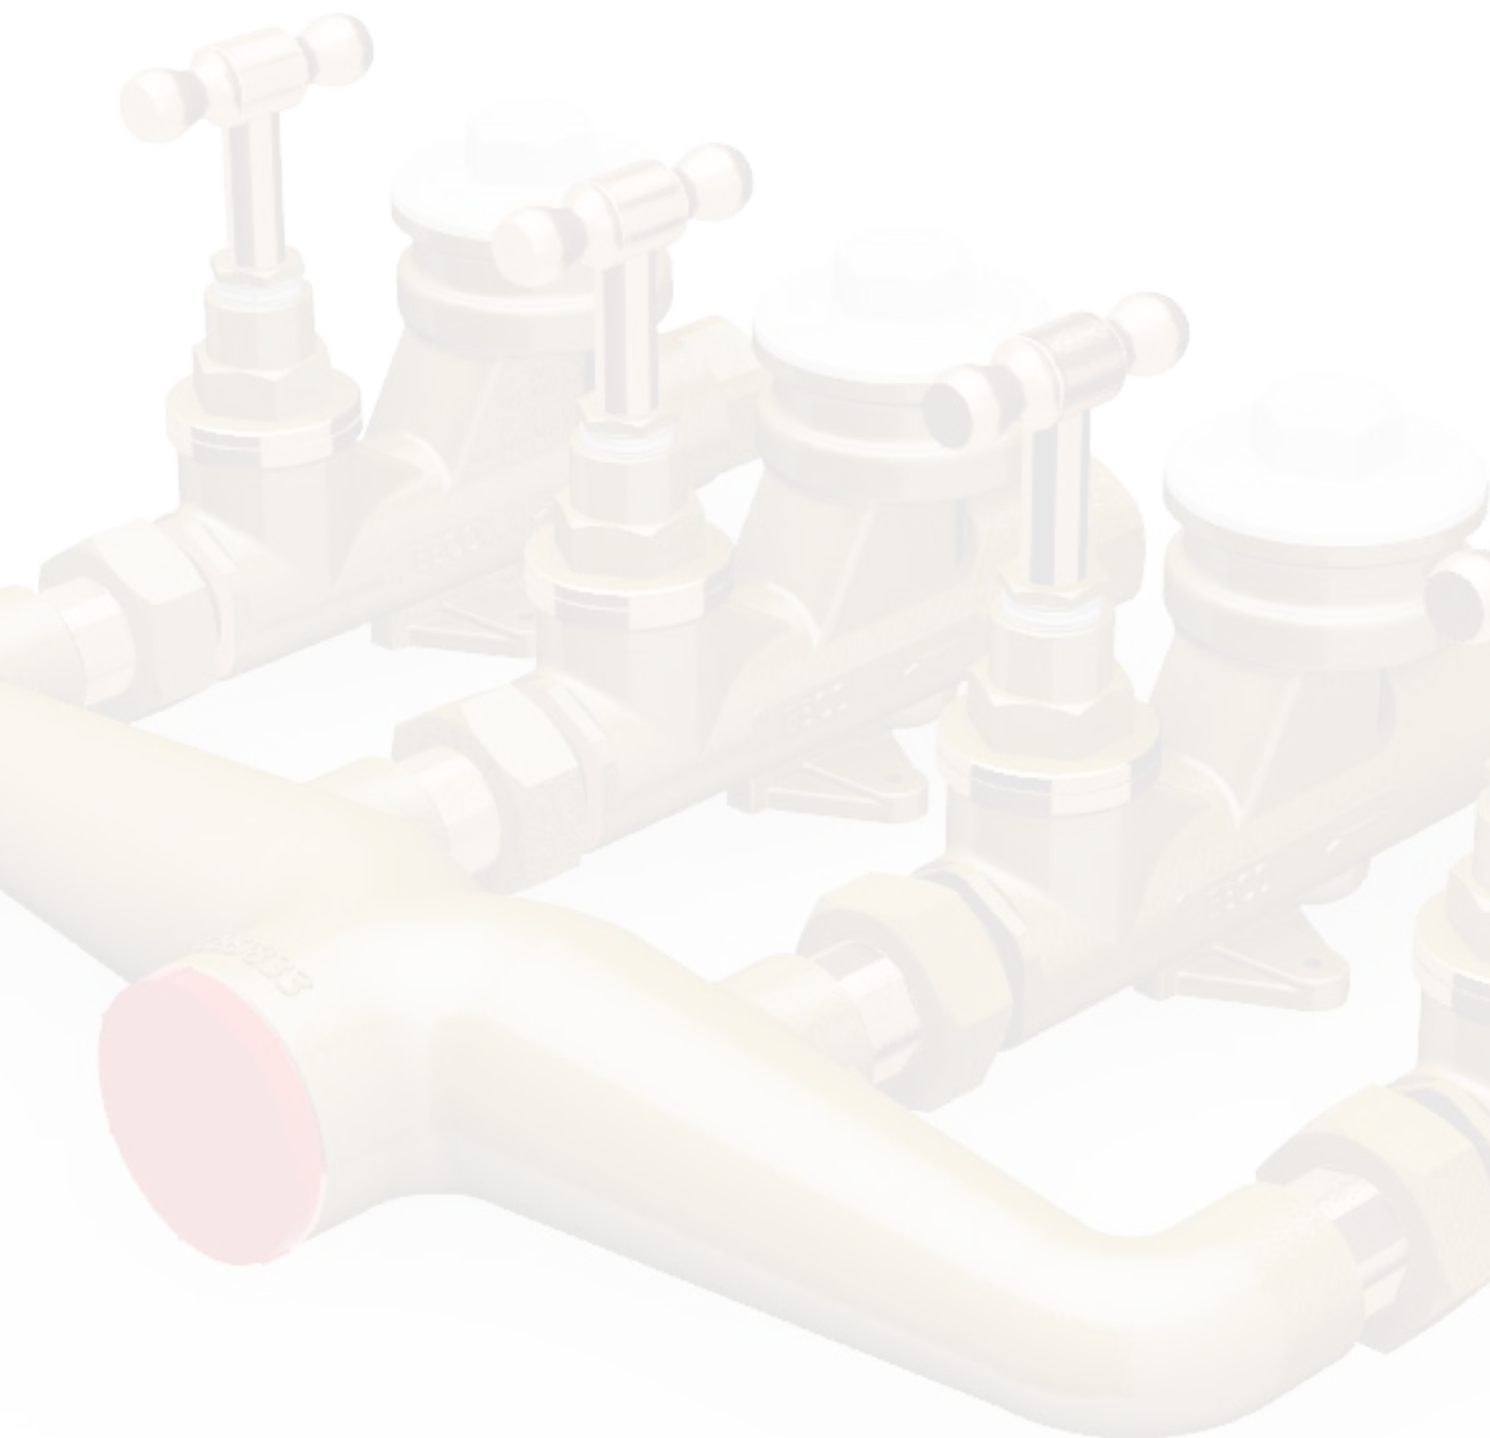

SERVICE VALVES

EBCO BS5433 STOPCOCK	031
TALBOT BS5433 STOPCOCK	032
EBCO BS1010 STOPVALVE	033
EBCO LEVER BALL VALVE	034
EBCO SPHERICAL BALL VALVE	035

EBCO BS5433 STOPCOCK CRUTCH HEAD

Specification

EBCO BS5433 Stopcock, Gunmetal
CC491K body, Nitrile/EPDM seals, crutch
head, WRAS approved product, PN16



Product Code	Pipe dia. MM	Connection	PN
SV5402FCR	1/2"	Female BSP	16
SV5403FCR	3/4"	Female BSP	16
SV5404FCR	1"	Female BSP	16
SV5406FCR	1 1/2"	Female BSP	16
SV5408FCR	2"	Female BSP	16
SV5425ZCR	25	Pushfit	16
SV5432ZCR	32	Pushfit	16
SV5450ZCR	50	Pushfit	16
SV5463ZCR	63	Pushfit	16
SV5420BCR	20	EBCO-B	16
SV5450BCR	50	EBCO-B	16
SV5463BCR	63	EBCO-B	16

TALBOT BS5433 STOPCOCK CRUTCH HEAD

Specification

Talbot BS5433 Stopcock, Gunmetal
CC491K body, Nitrile/EPDM seals, crutch
head, PN16



Product Code	Pipe dia. MM	Connection	PN
E2988	20	Pushfit	16
E2993	25	Pushfit	16
E2996	32	Pushfit	16
E2998	50	Pushfit	16
E3000	63	Pushfit	16
E2982	1/2"	Pushfit	16
E2983	3/4"	Pushfit	16

TALBOT BS5433 STOPCOCK SQUARE HEAD

Specification

Talbot BS5433 Stopcock, Gunmetal
CC491K body, Nitrile/EPDM seals, square
head, PN16



Product Code	Pipe dia. MM	Connection	PN
E2990	20	Pushfit	16
E2995	25	Pushfit	16
E2997	32	Pushfit	16

TALBOT BS5433 STOPCOCK CRUTCH HEAD

Specification

Talbot BS5433 Stopcock, Acetal or PP body, EPDM seals, crutch head, PN16



Product Code	Pipe dia. MM	Connection	PN
E5252	20	Pushfit	16
E5874	25	Pushfit	16
E5882	32	Pushfit	16
E6536	1/2"	Pushfit	16
E6535	3/4"	Pushfit	16
E6534	1"	Pushfit	16

EBCO BS1010 STOPVALVE

Specification

EBCO BS1010 Stopvalve, Brass body, crutch head, WRAS approved product, PN16



Product Code	Pipe dia. MM	Connection	PN
SV1015CCR	15	Compression	16
SV1022CCR	22	Compression	16

EBCO BS1010 STOPVALVE CRUTCH HEAD

Specification

EBCO BS1010 Stopvalve, Gunmetal
CC491K body, crutch head, PN16



Product Code	Pipe dia. MM	Connection	PN
SV1002FCRK	1/2"	Female BSP	16
SV1005FCRK	1 1/4"	Female BSP	16

EBCO LEVER BALL VALVE

Specification

EBCO Lever Ball Valve, DZR brass body, 1/4
turn lever, press sockets, PN25



Product Code	Pipe dia. MM	Connection	PN
LBVC15	15	Press fit socket	25
LBVC22	22	Press fit socket	25

EBCO BS1010 SPHERICAL BALL VALVE 1/4 TURN

Specification

EBCO BS1010 Spherical Ball Valve,
Gunmetal CC491K body, EPDM seals, 1/4
turn, WRAS approved product, PN16



Product Code	Pipe dia. MM	Connection	PN
GA21003AM	3/4"	Female BSP	10
GA21004AM	1"	Female BSP	10
GA21006AM	1 1/2"	Female BSP	10
GA21008AM	2"	Female BSP	10
SPH92525	25	Pushfit	10
GA23504AM	32	Pushfit	10

EBCO BS1010 SPHERICAL BALL VALVE 360 TURN

Specification

EBCO BS1010 Spherical Ball Valve,
Gunmetal CC491K body, EPDM seals, 360
turn, WRAS approved product, PN16



Product Code	Pipe dia. MM	Connection	PN
GA21003BM	3/4"	Female BSP	10
GA21004BM	1"	Female BSP	10
GA21006BM	1 1/2"	Female BSP	10
GA21008BM	2"	Female BSP	10
SPH02525	25	Pushfit	10
GA23504BM	32	Pushfit	10

Disclaimer & Reference to the SALES Terms & Conditions

This catalogue and the contained information have been collected with utmost care and should serve for general information purposes but does not create any binding offer or contract.

The products of Atlantic Plastics can only be purchased based on a separate Purchase Contract and the information provided in this catalogue will only become part of the Purchase Contract if and as far as specifically agreed in writing between the contracting parties and under the mandatory precondition, that the Customer has accepted the Terms & Conditions for Sale of Atlantic Plastics which can be ordered by the Customer at:

Atlantic Plastics
Brackla Industrial Estate
Coytrahene Close
Bridgend
CF31 2AX
United Kingdom

Atlantic Plastics endeavors to keep the information in this catalogue correct and up to date but expressly reserves the right to add or delete products and/or make any additions or changes to the information provided in the catalogue without any notice to the users.

Atlantic Plastics, however, does not bear any liability with regard to the accuracy and completeness of the information provided in this catalogue and Atplas will in no event be liable to any party for any direct, indirect, special or other consequential damages for any use of this information.

Atlantic Plastics Ltd

Coytrahene Close
Brackla Industrial Estate
Bridgend CF31 2AX
United Kingdom

Tel +44 (0)845 077 9797
www.atplas.co.uk
Email enquiries@atplas.co.uk

Note: Specifications may be changed without notification at any time.

© 2025 Atlantic Plastics Ltd
CAT_100925_INTERNAL METERING 2025_EN

