


# CONVERSION OF MATRIX DOUBLE BOUNDARY BOX TO LOGGER BOX

## INSTALLATION INSTRUCTIONS

Conversion of the Matrix Double Boundary Box for use as a logger box should take place prior to installation in the ground.

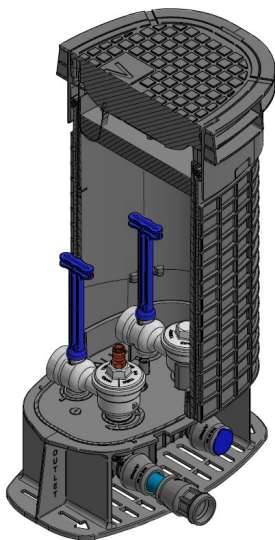

1. Remove the white full flow cap from one of the meter ports, and dispose of it. Replace it with the flow cap with tapped hole and connector for the logging equipment.
2. Connect the supplied piece of 25mm MDPE pipe to the Pushfit outlet of the box, and connect the supplied Pushfit Stop End on to the other end of the pipe. Follow the Pushfit instructions supplied on the installation instructions for the box.