

WATER POINT

16 Bar pressure rating




The Atplas Water Point provides a visually elegant, safe environment to house water meters which are installed inside a property. The Water Point consists of a stopcock and a concentric meter port with a built in non-return valve and drain-off point, which can be accessed by removing the front cover of the box. The meter can be read through the lens on the top of the box. The box is large enough to also contain AMR equipment.

Feature	Specification
Drain Off Valve	To meet BS 2464
Meter Connection	1½" BSP concentric meter to BS EN ISO 4064; Q3 4.0 (Qn 2.5)
Inlet	15/22mm copper compression or pushfit connector for 25mm PE
Outlet	15/22mm copper compression

Product Code	Pipe dia. Inlet MM	Inlet Connection	Pipe dia. Outlet MM	Outlet Connection
WA3261515AM	15	Compression	15	Compression
WA3261522AM	15	Compression	22	Compression
WA3262215AM	22	Compression	15	Compression
WA3262222AM	22	Compression	22	Compression
WA3262515AM	25	PE Pushfit	15	Compression
WA3262522AM	25	PE Pushfit	22	Compression

The technical data and performance may be modified without prior notice depending on the technical advances.


Item	Description	Material	Standard
1	Box Cover	ABS	
2	Lens	Polycarbonate	
3	Box back plate	ABS	
4	Copper inlet/outlet	Copper	BS EN 1254-2
	Plastic inlet	POM / PP	
5	Stopcock and fixing clips	POM / PP	
6	Meter cap/body/drain off valve	POM	BS EN ISO 4064-4
7	Seals	EPDM / Nitrile / PTFE	

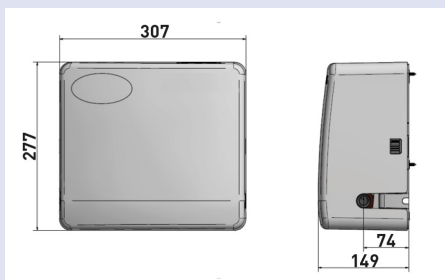

Technical data

Pressures Working Test
 Water: 16 bar 24 bar
 Temperature: Up to 23°C

Temperature increases may affect the installed life of the product.
 For further information relating to operating temperatures/pressure please contact Atplas.

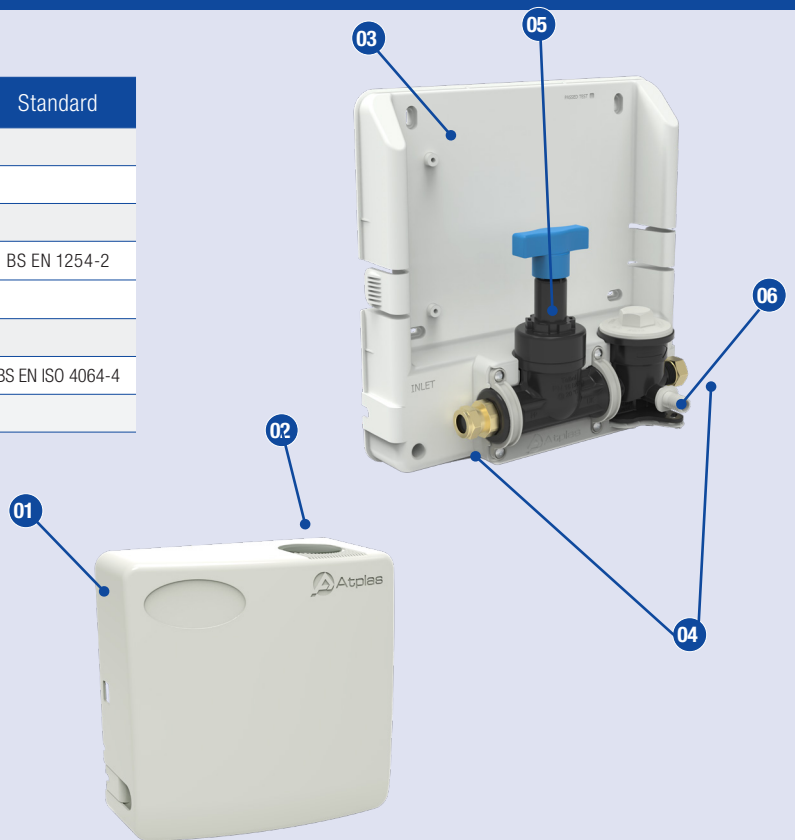

CHARACTERISTICS

- Plastic box** Backplate and removable cover with wall fixings provided.
- Plastic Stopcock**, BS5433 type stopcock acetal/PP
- Meter connection** - for G 1 1/2" meter to BS EN ISO 4064. Fits all commonly sold concentric meters.
- Full flow meter cap** - plastic. Allows manifold to be flushed and tested prior to fitting the meter. Also compatible with Atplas trickle flow and no flow caps
- Drain off valve** to meet BS 2464.
- Check Valve** integrated in meter port to BS EN 13959: 2004 Family E Type B.
- Range of different outlets** for PE pushfit connection or copper compression fitting.
- Flexible connections** Variants for copper or PE connection in different sizes.



15mm

PRODUCT CODE

15mm in / 15mm out **WA3261515AM**
 15mm in / 22mm out **WA3261522AM**



22mm

PRODUCT CODE

22mm in / 15mm out **WA3262215AM**
 22mm in / 22mm out **WA3262222AM**



25mm MDPE

PRODUCT CODE

25mm in / 15mm out **WA3262515AM**
 25mm in / 22mm out **WA3262522AM**

* Meter not included