

TALBOT INTERNAL METER CARRIER MANIFOLD

16 Bar pressure rating



Talbot Internal Meter Carrier Manifolds make it easy to fit concentric water meters internally in a property. Different kits are available to suit various pipework for all applications. The standard kit comes with a Talbot Stopcock (BS5433) on one side and on the other side a Talbot Internal Meter carrier including drain off point BS2464.

| Feature | Specification |
|------------------|---|
| Drain Off Valve | To meet BS 2464 |
| Meter Connection | 1½" BSP concentric meter to BS EN ISO 4064; Q3 4.0 (Qn 2.5) |
| Inlet | 15/22mm copper compression or pushfit connector for 25mm PE |
| Outlet | 15/22mm copper compression |

| Product Code | Pipe dia. Inlet MM | Inlet Connection | Pipe dia. Outlet MM | Outlet Connection |
|--------------|--------------------|------------------|---------------------|-------------------|
| WA3281515BM | 15 | Compression | 15 | Compression |
| WA3281522BM | 15 | Compression | 22 | Compression |
| WA3282215BM | 22 | Compression | 15 | Compression |
| WA3282222BM | 22 | Compression | 22 | Compression |
| MA3282515AM | 25 | PE Pushfit | 15 | Compression |
| MA3282522AM | 25 | PE Pushfit | 22 | Compression |

The technical data and performance may be modified without prior notice depending on the technical advances.


| Item | Description | Material | Standard |
|------|--------------------------------|-----------------------|------------------|
| 1 | Copper inlet/outlet | Copper | BS EN 1254-2 |
| | Plastic inlet | POM / PP | |
| 2 | Stopcock | POM / PP | |
| 3 | Meter cap/body/drain off valve | POM | BS EN ISO 4064-4 |
| 4 | Seals | EPDM / Nitrile / PTFE | |

Technical data

Pressures Working Test
Water: 16 bar 24 bar

Temperature: Up to 23°C

Temperature increases may affect the installed life of the product.
For further information relating to operating temperatures/pressure please contact Atplas.

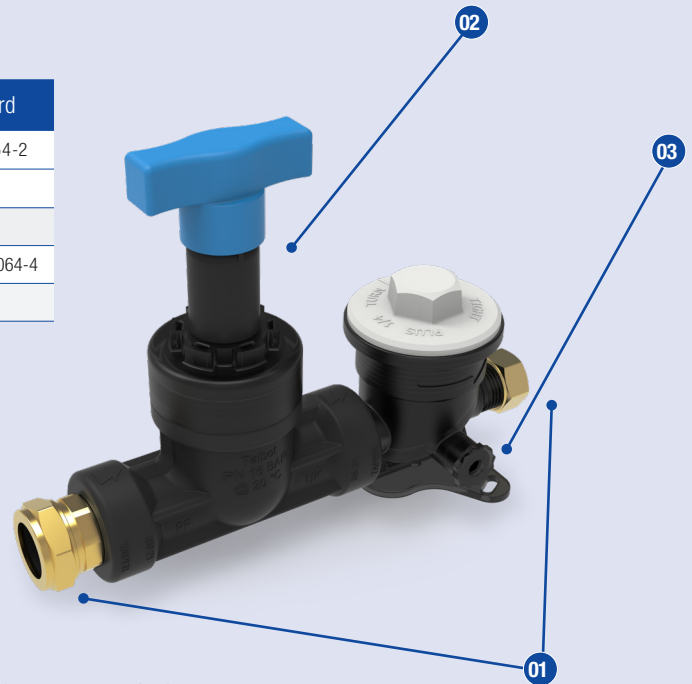

CHARACTERISTICS

- Plastic Stopcock**, BS5433 type stopcock acetal/PP
- Meter connection** - for G 1 1/2" meter to BS EN ISO 4064. Fits all commonly sold concentric meters.
- Full flow meter cap** - plastic. Allows manifold to be flushed and tested prior to fitting the meter. Also compatible with Atplas trickle flow and no flow caps
- Drain off valve** to meet BS 2464.
- Check Valve** integrated in meter port to BS EN 13959: 2004 Family E Type B.
- Range of different outlets** for PE pushfit connection or copper compression fitting.
- Flexible connections** Variants for copper or PE connection in different sizes.



15mm

PRODUCT CODE

15mm in / 15mm out **WA3281515BM**
15mm in / 22mm out **WA3281522BM**



22mm

PRODUCT CODE

22mm in / 15mm out **WA3282215BM**
22mm in / 22mm out **WA3282222BM**



25mm MDPE

PRODUCT CODE

25mm in / 15mm out **MA3282515AM**
25mm in / 22mm out **MA3282522AM**