

EBCO BELOW GROUND BOUNDARY BOX UNSEALED RIGID PLASTIC RAISED MANIFOLD

25mm PE Connections Class 2.N 12.5 Bar pressure rating Grade C load bearing



PRODUCT CODE	CONNECTION	SHUT OFF	MANIFOLD STYLE	HEIGHT
MBR903	25 mm PF	¼ Turn	Raised/Plastic	695mm




EBCO Below Ground Boundary Box

EBCO BELOW GROUND BOUNDARY BOX

25mm PE Connections Class 2.N 12.5 Bar pressure rating Grade C load bearing

Feature	Specification
Frame and Cover	None
Guard Tube Material	PVC
Guard Tube Profile	Cylindrical with 200mm diameter / 4mm wall. Bayonet quick fit assembly
Height (apr)	695mm
Frost Protection	As standard in accordance with BS 5834-1:2017
Water Tightness	Unsealed Class 2
Shut Off Device	¼ turn with fan-head
Check Valve	In accordance with BS EN 13959: 2004 Family E Type B
Manifold	Raised style in Plastic (Acetal Co-Polymer)
Meter Connection	1½" BSP concentric meter to to BS EN ISO 4064; Q3 4.0
Head Loss	< 3 metres @ 25 l/min flow rate with meter
Inlet	25 mm Pushfit for PE pipe in accordance with WIS 4-32-11
Outlet	25 mm Pushfit for PE pipe in accordance with WIS 4-32-11
Blank Plugs	Full Flow (standard), Trickle Flow (optional), No Flow (optional). 27/28 mm tapered A/F hexagonal upstand
Product Weight (apr)	3.4kg
Pallet Quantity	50 per pallet
Tools	BOP77011-28: 28mm socket for meter plug & NRV BOP77008: Short T bar 400mm long BOP77009: T bar extension 500mm long

The technical data and performance may be modified without prior notice depending on the technical advances.

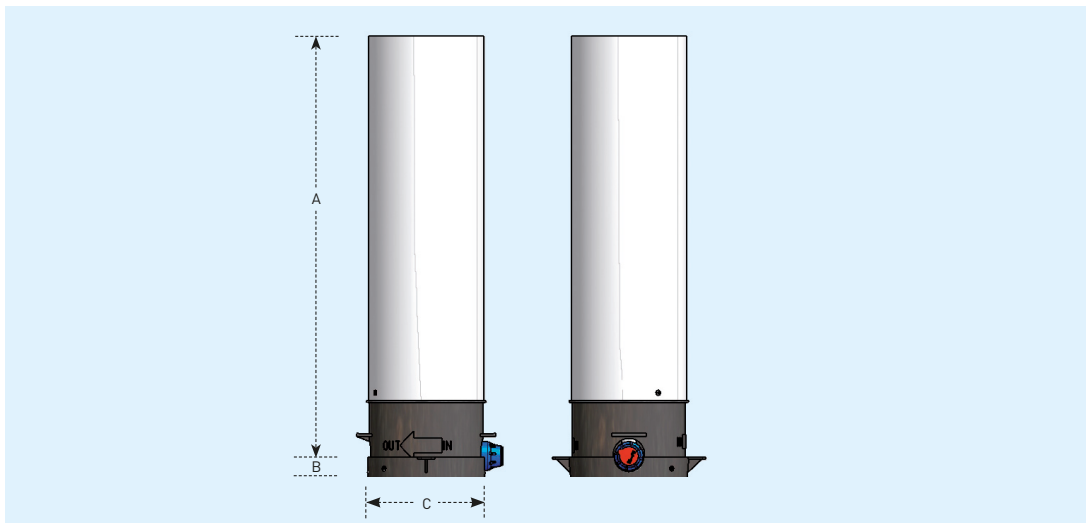

Box	A (min/max)	B	C
EBCO	813mm	33mm	208mm