

MATRIX PLUS BELOW GROUND BOUNDARY BOX SEALED TELESCOPIC PLASTIC RAISED MANIFOLD

25/32mm PE Connections Class 1.N.SBB.T 16 Bar pressure rating Grade B load bearing



PRODUCT CODE	SURFACE BOX	GUARD TUBE SHAPE	CONNECTIONS	SHUT OFF
1954-125-10-8-16	Grade B Polymer	Matrix Plus S - Stadium	25mm PF	¼ Turn
1954-132-10-8-16	Grade B Polymer	Matrix Plus S - Stadium	32mm PF	¼ Turn
1954-125-10-8-18-02	Grade B Polymer	Matrix Plus S - Stadium - short box	25mm PF	¼ Turn
1954-125-20-8-17	Grade B Polymer	Matrix Plus R - Round	25mm PF	¼ Turn
1954-132-20-8-17	Grade B Polymer	Matrix Plus R - Round	32mm PF	¼ Turn


* Lid marked 'WATER' and incorporates metal detector plate

*** Available with 360° spherical valve on request



Feature	Specification
Frame and Cover	Universal 8° tilt. Pluck lid with Square swivel plate. Lid tether as standard. Glass Filled Polypropylene, Grade B load bearing according to BS 5834-2:2011
Guard Tube Material	Recycled Polypropylene
Guard Tube Profile	Stadium profile with 310mm x 202mm opening (Matrix Plus S) or round profile with diameter 194mm opening (Matrix Plus R)
Height Adjust (apr)	See below dimension table
Frost Protection	As standard in accordance with BS 5834-1:2017
Water Tightness	Sealed Class 1.N.SBB.T
Shut Off Device	360°/ ¼ turn spherical valve
Check Valve	In accordance with BS EN 13959: 2004 Family E Type B. (Double check valve also available)
Manifold	Raised style in Plastic (Acetyl Co-Polymer)
Meter Connection	1½" BSP concentric meter to BS EN ISO 4064; Q3 4.0 (Qn 2.5)
Head Loss	< 3 metres @ 25 l/min flow rate with meter
Inlet	25/32 mm Pushfit for PE pipe in accordance with EN 12201-3
Outlet	25/32 mm Pushfit for PE pipe in accordance with EN 12201-3
Blank Plugs	Full Flow (standard), Trickle Flow (optional), No Flow (optional). 27/28 mm tapered A/F hexagonal upstand
Product Weight (apr)	Standard Box: 3.7 kg Short Box: 3 kg
Pallet Quantity	50 per pallet (Matrix Plus S), 40 per pallet (Matrix Plus R)

The technical data and performance may be modified without prior notice depending on the technical advances.

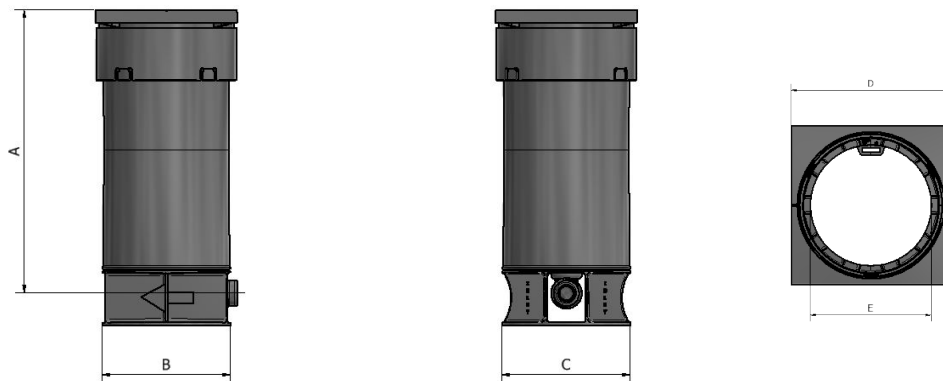

Box	A (min/max)	B	C	D	E
1954-125-10-8-16	510-885mm	207mm	151mm	235mm	173mm
1954-132-10-8-16	510-885mm	207mm	151mm	235mm	173mm
1954-125-10-8-18-02	320-540mm	207mm	151mm	235mm	173mm
1954-125-20-8-17	500/880 mm	206mm	206mm	235mm	173mm
1954-132-20-8-17	500/880 mm	206mm	206mm	235mm	173mm

MATRIX PLUS BELOW GROUND BOUNDARY BOX SEALED TELESCOPIC PLASTIC RAISED MANIFOLD